



# QuietDrive Pro

Re-order code: MR655EVO



**DOOR TYPES:** residential rolling garage doors **DOOR SIZE:** up to 16.5m<sup>2</sup>

## Key Benefits



**Compliant to Australian and New Zealand Standard AS/NZS 60335-2-95**



### Security+2.0

Transmitters communicate on multiple frequencies with encrypted rolling code. This ensures the strongest frequency is selected every time, virtually eliminating interference while providing the highest level of security.



### Up to 75% less energy\*

Advanced technology uses less than 1 watt of power whilst in standby mode, meeting the world's toughest energy standards.



### Quiet and Powerful Motor

The powerful and fast DC motor is quiet and built to last with the strength to open any branded domestic door.



### Improved Transmitter Range

Tested against other products, these transmitters have up to 18% better range which means you can start opening your garage door sooner.



### Soft Start / Stop Function

Designed to ensure smooth and quiet door operation.



### 5 Year Warranty

Backed by a 5 year / 10,000 cycle warranty\*\* we stand behind our products with an after sales support team that we believe are the best in the industry.

## Standard Merlin Safety Features



### Premium Automatic Safety Reverse

With its automatic safety function your garage door will stop and reverse automatically if obstructed going down or stop going up.



### Automatic Force Sensing

Equipped with automatic force sensing, with each operation the garage door opener monitors and adjusts the force needed to open your garage door.



### Manual Release

In case of power failure you can simply activate the manual release to open your garage door.

\*when compared to other available products \*\*conditions apply



## Kit Contents

1 x Powerhead



2 x Premium+ remote controls E960M




Two channel wireless wall button E138M



Weight bar

## SPECIFICATIONS


- 24V DC motor with thermal overload protection
- Input voltage: 240V AC
- Rated door area up to 16.5m<sup>2</sup>
- Drum rotations: 4.5
- Max door weight: up to 100kg
- Max peak pulling force: 500 N
- Minimum side room 45mm
- 433.30, 434.54, 433.92 MHz AM radio with Security+2.0 encrypted rolling code technology.
- Up to 64 memory registers
- Garage illumination: New LED lighting
- Noise rating 1M : 57DB

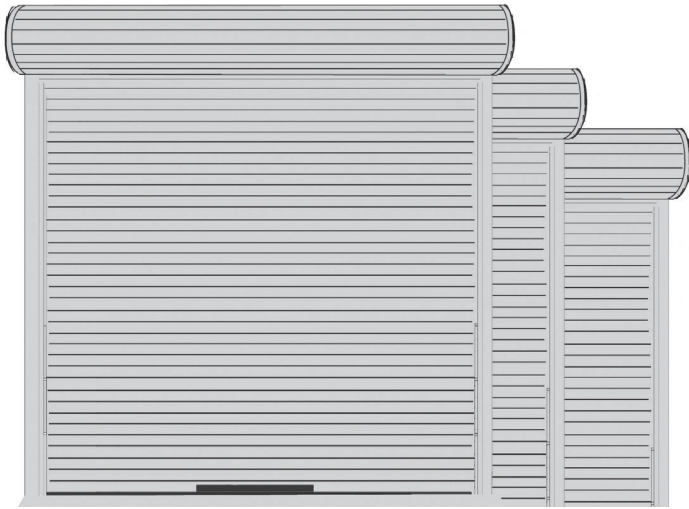

### DOOR SPECIFICATIONS



- Maximum lifting under spring tension = 20kg
- Suitable for steel spring balanced doors

### DOOR OPENING AND CLOSING TIMES

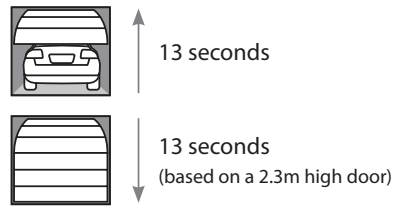

Door height: 4.5m, 3.0m Door width: 3.6m, 5.4m  
Single dwelling, max door weight: up to 100kg

### TYPICAL INSTALLATION

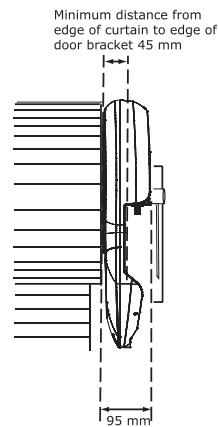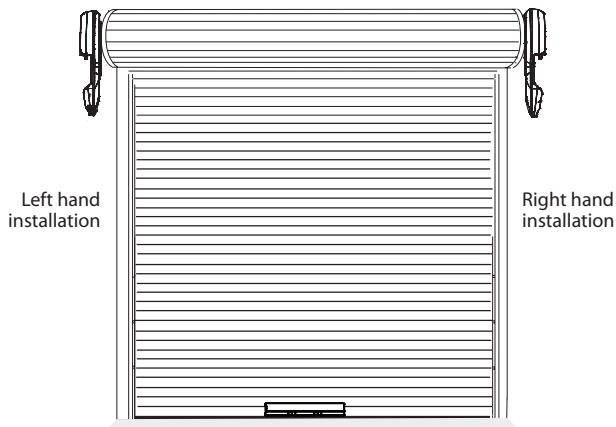

### OPTIONAL ACCESSORIES



Wall or visor mounted  
three channel transmitter  
E943M



Wall or visor mounted  
single channel transmitter  
E940M



3 channel mini transmitter  
E945M



Wireless keypad  
E840M



Protector system  
safety beam sensors  
774ANZ

**CHAMBERLAIN**<sup>®</sup>

The World's Largest Manufacturer of Garage Door Openers

**Australia** Phone: 1800 638 234 Fax: 1800 888 121 Web: [gomerlin.com.au](http://gomerlin.com.au)  
**New Zealand** Phone: 0800 653 667 Fax: 0800 653 663 Web: [gomerlin.co.nz](http://gomerlin.co.nz)

™ Trademark of The Chamberlain Group, Inc. ® Registered Trademark of the Chamberlain Group, Inc.  
© 2017 The Chamberlain Group, Inc.

